

▶ FOOT CARE INNOVATIONS

▶ High Quality Instruments

▶ Precision Tools

▶ Professional Grade Accessories



WWW.ROTATOOL.COM | SALES@ROTATOOL.COM | 1.866.515.7995

▶ ROTATOOL™ DELUXE 2

ULTRA-QUIET, LIGHT-WEIGHT, POWERFUL LIGHT SOURCE



The Deluxe 2 offers a high level of comfort while meeting the latest standards in technology. The ultra-quiet and powerful suction motor enables removal of most airborne dust from the treatment area. Thanks to the sleek handpiece shape with a diameter of only 19 mm, you can hold the handpiece like a pencil. The powerful light source ensures accuracy even in poor ambient light. In addition, the new start/pause button allows easy start and pause of the unit during work, preventing accidental starts at high speeds. The powerful brushless motor runs at a speed of 6,000 to 40,000 rpm.



The knob of the **Quick Chuck Device**, which allows you to change the tools easily and securely, has been made of TPE (*thermoplastic elastomer*). TPE is a soft material that makes it comfortable to use the knob.



There is a **Light Source**, which is directly implemented at the hand piece, and which allows for ideal work conditions even when the external light sources are insufficient.

▶ ROTATOOL™ ESSENTIAL 2


BASE MODEL THAT IS ANYTHING BUT BASIC



The Essential 2 suction unit is a high-quality, ultra-quiet suction unit for professional foot care. Airborne dust is picked up directly by the point suction and reliably collected in the micro filter bag. The handpiece is equipped with our patented clamping system with a soft and comfortable knob made from TPE (thermoplastic elastomer). The handpiece offers the same ergonomic design as the Deluxe 2. The powerful brushless motor runs at a speed of 6,000 to 40,000 rpm. With two memory keys, saving speed and suction settings has never been easier.

— SIMPLE & FAST HANDPIECE MAINTENANCE —

Simple and fast maintenance of the basic components of the hand piece is a key benefit of the Rotatool™ units. The regular maintenance of the hand piece should take less than one minute to complete. Follow the steps detailed in the user manual provided with the unit. Regular cleaning and basic maintenance can be easily performed by the end user. Repairs and servicing should be performed by an authorized Rotatool™ technician.

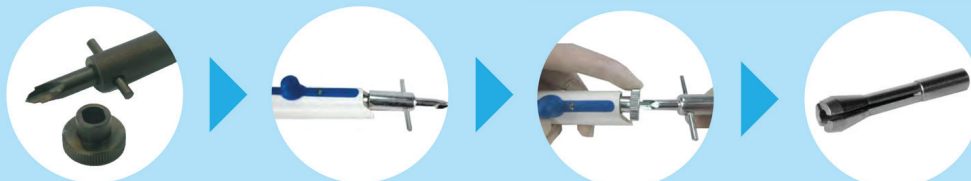

ROTATOOL™ SPRAY

FEATURING FINE SPRAY ATOMISATION TECHNOLOGY



The Rotatool™ Spray is setting the standard for Podiatry units. It is equipped with programmable memory and an LED light in the hand piece, plus its unique fine spray atomisation technology providing the user with ultimate control. All Rotatool™ units feature a Brushless Suction Motor, which is not only ultra-quiet, but also much lighter in weight than other units. The unit boasts a superior clamping system that effectively secures instruments in place, even during high-speed operations. Maintenance and washer exchange indicators alert users when servicing is required, ensuring optimal performance and longevity of the unit. The unit offers a rinsing and cleaning function, effectively removing built-up debris, and a drying function facilitates the swift drying of skin post-treatment. With a broad range of speeds from 6,000 to 40,000 RPM, the Rotatool™ Spray offers versatility to accommodate diverse treatment requirements and preferences.

UNIT SPECIFICATIONS

DELUXE 2

TECHNOLOGY
Speed: 6,000 - 40,000 RPM
Maintenance-free Brushless Suction Motor
Modern, easy-to-clean membrane keyboard
Extra large speed display
Regular and reverse switch (left/right)
Works only with Micro Filter RT-H5179
Displays information about: speed/left right direction, Suction level, date and time, filter change and date of last inspection
3 programmable memory buttons

TECHNICAL DATA
Size: W 273 x H 142 x D 235 mm (W 11" x H 5 1/2" x D 9 1/4") *excludes exterior parts attached
Suitable for all Hadewe carrying cases
Total weight: 2.7 kg (6 lbs)
Noise level: 49 db (55 db at full throttle)

HAND PIECE FEATURES
Maintenacne-free, Brushless Hand Piece Motor
Patented Power Clamping System
High torque, low vibration, silent running
Suitable for all common burs of Ø 2.35 mm (3/32")
Two-fold sealing of the ball bearings
Hand Piece: Ø 3/4"-1", length 5 3/4", weight 5.29 oz
Powerful LED-light at the top of the handpiece

ESSENTIAL 2

TECHNOLOGY
Speed: 6,000 - 40,000 RPM
Maintenance-free Brushless Suction Motor
Modern, easy-to-clean membrane keyboard
Extra large speed display
Regular and reverse switch (left/right)
Works only with Micro Filter RT-H5179
2 programmable memory buttons

TECHNICAL DATA
Size: W 273 x H 142 x D 235 mm (W 11" x H 5 1/2" x D 9 1/4") *excludes exterior parts attached
Suitable for all Hadewe carrying cases
Total weight: 2.7 kg (6 lbs)
Noise level: 49 db (55 db at full throttle)

HAND PIECE FEATURES
Maintenacne-free, Brushless Hand Piece Motor
Patented Power Clamping System
High torque, low vibration, silent running
Suitable for all common burs of Ø 2.35 mm (3/32")
Two-fold sealing of the ball bearings
Hand Piece: Ø 3/4"-1", length 5 3/4", weight 5.29 oz

SPRAY

TECHNOLOGY
Speed: 6,000 - 40,000 RPM
Modern, easy-to-clean membrane keyboard
Extra large speed display
Regular and reverse switch (left/right)
Spray System: Fine Spray Nebulation (200ml tank)
3 programmable memory buttons

TECHNICAL DATA
Size: W 245 x H 133 x D 190 mm (W 9 1/2" x H 5 1/4" x D 7 1/2") *excludes exterior parts attached
Suitable for all Hadewe carrying cases
Total weight: 2.6 kg (5.7 lbs)

HAND PIECE FEATURES
Maintenacne-free, Brushless Hand Piece Motor
Patented Power Clamping System
High torque, low vibration, silent running
Suitable for all common burs of Ø 2.35 mm (3/32")
Two-fold sealing of the ball bearings
Hand Piece: Ø 2/3"-5/6", length 5 2/3", weight 5.11 oz

PRECISION GERMAN MANUFACTURED

▶ ROTATOOL™ BURRS TiAIN - AC-BLUE WEAR PROTECTION COATING

TiAIN coating offers high durability and removal rate, easy cleaning and longer life, as well as reduced heat development compared to non-coated burs.



▶ ROTATOOL™ NEM BURS

NEM burs combines both coarse and fine cuts in one bur providing highly efficient reduction combined with a smooth finish.



▶ ROTATOOL™ LSQ BURS

LSQ burs offer a high removal rate and are well suited for fast removal of thick nails and callus.



▶ ROTATOOL™ LGQ BURS

LGQ burs offer a very high removal rate and are well suited for fast removal of thick nails and callus.



▶ ROTATOOL™ STANDARD CARBIDE BURS

High quality carbide burs that come in fine, medium, coarse, and extra coarse cuts. The extra coarse burs should only be used for the reduction of very thick wooden nails.



▶ ROTATOOL™ STANDARD DIAMOND BURS

High quality diamond burs that come in medium, coarse, and extra coarse grits. Long lasting and excellent for callus removal and smoothing nails.
(Different grits available.)




▶ ROTATOOL™ EXPERT DIAMOND BURS


High quality diamond burs offering a larger surface area for callus removal. Various grits available.




COARSE CROSS CUT



MEDIUM CROSS CUT



FINE CROSS CUT



▶ **ROTATOOL™ CERAMIC BURS**
 High quality ceramic burs that offer all of the effectiveness of a carbide with limited heat generation.



▶ **ROTATOOL™ NEQ BALL & TREPHINE BURS**
 All diameters NEQ ball burs have eight blades and offer efficient and effective corn removal. The trephine burs come with or without blades.



▶ **ROTATOOL™ DIAMOND BALL BURS**
 Various diameters of diamond ball burs are available to effectively remove small calluses and smooth nails.



▶ PACK IT UP YOU'RE READY TO GO

CASES & SOLUTIONS TO TAKE YOUR PRACTICE ON THE ROAD



Clever Carry Case RT-H0656

The Clever Carry Case is made of impact resistant ABS (Acrylonitrile butadiene styrene) polymer, making it easy-to-clean and disinfect. The case features two drawers, sturdy rollers and a telescopic handle.



Rotatool Go Rechargeable Nail File RT-RTGO (standard) RT-RTGO-AUTO (autoclavable)

The Rotatool GO rotary tool is a compact, cordless, rechargeable unit allowing for convenient portability. This versatile rotary unit is light-weight and offers a low vibration handpiece and a digital RPM display. The perfect unit for nail and callus debridement or as a back-up to a suction or spray unit.

RPM Range 6,000-30,000



Heavy-Duty Foot Rest RT-H6559 (Regular) & RT-H6819 (Short)

The heavy-duty foot rest is perfect for mobile foot care, allowing you to place the client's foot in a comfortable position. The foot rest offers more stability and can withstand additional weight with six locking height adjustments. The foot rest is easily portable and collapses down to be stored in a convenient carry case.

Regular: Weight 1.1kg / Height 50cm - 63cm

Short: Weight 1.0 kg / Height 33cm - 46cm



reLEGx Foot Rest RT-H6722 (White) RT-H6723 (Grey)

Thanks to the combination of aluminum and stainless steel, this footrest weighs just 1.1 kg. The foot rest offers angle and locking height adjustment similar to the heavy-duty version. The contoured padded cushion can withstand frequent disinfection. The foot rest comes with a carry bag. Available in white or grey.

Weight 1.1 kg / Height 52 to 62 cm



Standard Foot Rest RT-H0912

The standard foot rest offers both angle and height adjustment with an innovative pedestal base. An excellent light-weight foot rest for mobil foot care. Weight 1.1 kg / Height 46-67 cm



Plastic Tool Tray (RT-H0219)

The hard plastic tray allows you to keep all your tools and instruments easily within reach. The tray can be turned 360° in all directions. Includes 2 tool trays and 1 holder that gets screwed onto the foot rest shaft. Note: this tray only fits on the RT-H0912 foot rest. Weight 400g / Tray Size W26cm x H7.5cm x D36cm



Flex Catch Basin (RT-H3674)

The Flex Catch Basin is made of a disinfectable elastic material, providing a more comfortable experience for your client. The basin catches debris making for a cleaning work area and can be easily disinfected between uses.

Size W33cm x H10cm x D51cm / Weight 580g

ABRASIVE CAPS Effective & Efficient!

PODO

SK PODO, round Ø5mm

Image	Part Product	Description	Grit
	RT341PD-C100	XS-C Podo Cap 05080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT341PD-M100	XS-M Podo Cap 05150 - 100/Pack	Medium

SK PODO, round Ø7mm

Image	Part Product	Description	Grit
	RT342PD-C100	S-C Podo Cap 07080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT342PD-M100	S-M Podo Cap 07150 - 100/Pack	Medium

SK PODO, round Ø10mm

Image	Part Product	Description	Grit
	RT343PD-C100	M-C Podo Cap 00080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT343PD-M100	M-M Podo Cap 10150 - 100/Pack	Medium

SK PODO, round Ø13mm

Image	Part Product	Description	Grit
	RT344PD-C50	L-C Podo Cap 13080 - 50/Pack	Coarse
	RT344PD-M50	L-M Podo Cap 13150 - 50/Pack	Medium
	RT344PD-C100	L-C Podo Cap 13080 - 100/Pack	Coarse
	RT344PD-M100	L-M Podo Cap 13150 - 100/Pack	Medium
RPM: 7,000 - 10,000 (Max RPM: 11,000)			

SK PODO, round Ø16mm

Image	Part Product	Description	Grit
	RT345PD-C50	XL-C Podo Cap 16080 - 50/Pack	Coarse
	RT345PD-M50	XL-M Podo Cap 16150 - 50/Pack	Medium
	RT345PD-C100	XL-C Podo Cap 16080 - 100/Pack	Coarse
	RT345PD-M100	XL-M Podo Cap 16150 - 100/Pack	Medium
RPM: 7,000 - 10,000 (Max RPM: 11,000)			

Pointed & Conical Cap Shapes Also Available



THERMO

SK THERMO, round Ø5mm

Image	Part Product	Description	Grit
	RT341TH-C100	XS-C Thermo Cap 05080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT341TH-M100	XS-M Thermo Cap 05150 - 100/Pack	Medium

SK THERMO, round Ø7mm

Image	Part Product	Description	Grit
	RT342TH-C100	S-C Thermo Cap 07080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT342TH-M100	S-M Thermo Cap 07150 - 100/Pack	Medium

SK THERMO, round Ø10mm

Image	Part Product	Description	Grit
	RT343TH-C100	M-C Thermo Cap 00080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT343TH-M100	M-M Thermo Cap 10150 - 100/Pack	Medium


SK THERMO, round Ø13mm

Image	Part Product	Description	Grit
	RT344TH-C50	L-C Thermo Cap 13080 - 50/Pack	Coarse
	RT344TH-M50	L-M Thermo Cap 13150 - 50/Pack	Medium
	RT344TH-C100	L-C Thermo Cap 13080 - 100/Pack	Coarse
	RT344TH-M100	L-M Thermo Cap 13150 - 100/Pack	Medium
RPM: 7,000 - 10,000 (Max RPM: 11,000)			

SK THERMO, round Ø16mm

Image	Part Product	Description	Grit
	RT345TH-C50	XL-C Thermo Cap 16080 - 50/Pack	Coarse
	RT345TH-M50	XL-M Thermo Cap 16150 - 50/Pack	Medium
	RT345TH-C100	XL-C Thermo Cap 16080 - 100/Pack	Coarse
	RT345TH-M100	XL-M Thermo Cap 16150 - 100/Pack	Medium
RPM: 7,000 - 10,000 (Max RPM: 11,000)			

HOLDERS



Precise - Exact Fit - Safe

The LUKAS abrasive cap holders provide a precise fit to both PODO and THERMO abrasive caps and ensure high safety in foot care. During the treatment, the cap is held firmly in place on the holder. After use, caps can be quickly exchanged.

All LUKAS cap holders feature a stainless steel shaft.

Image	Part Product	Description	Recommended Speed / RPM
	RT341-3/32	GT PODO 5 mm round XS	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT342-3/32	GT PODO 7 mm round S	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT343-3/32	GT PODO 10 mm round M	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT344-3/32	GT PODO 13 mm round L	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT345-3/32	GT PODO 16 mm round XL	RPM: 7,000 - 10,000 (Max RPM: 11,000)



The world's first innovative colour change technology!



▶ FOOT CARE INNOVATIONS

▶ High Quality Instruments

▶ Precision Tools

▶ Professional Grade Accessories



1550 SAMCO RD,
RAPID CITY, SD 57702, USA